

FIG. 1

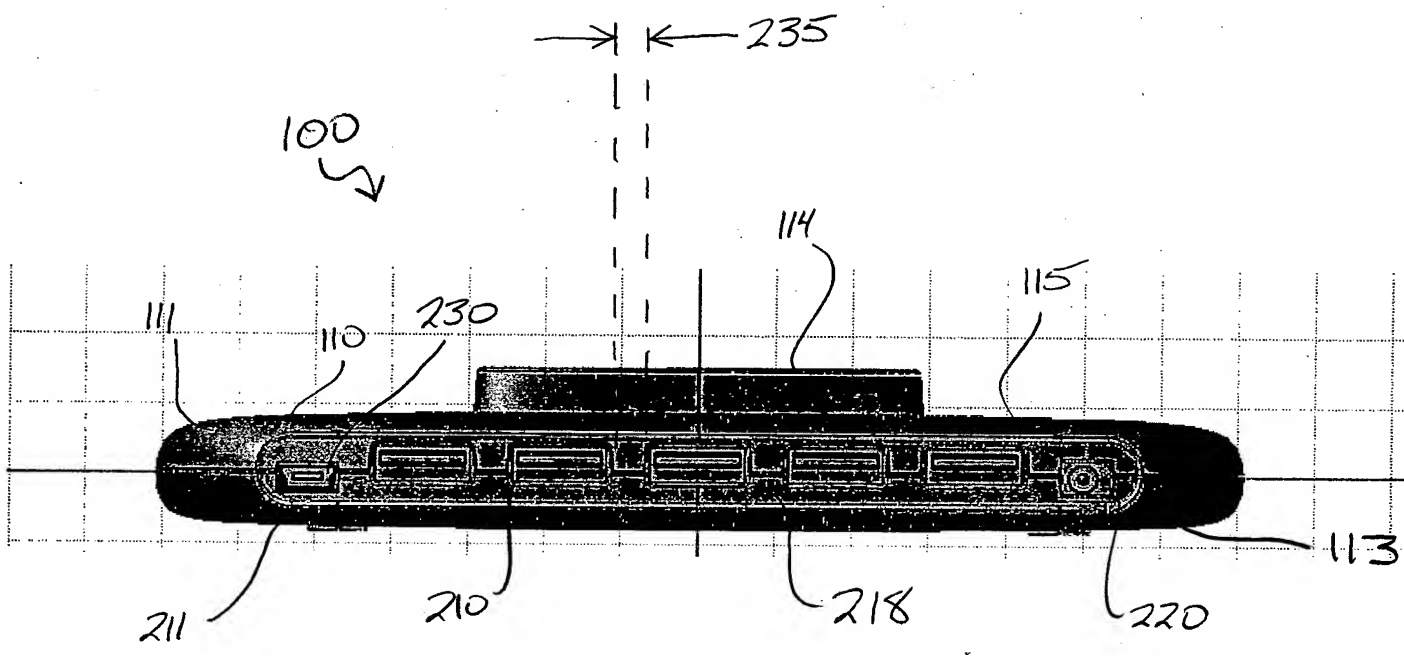


FIG. 2

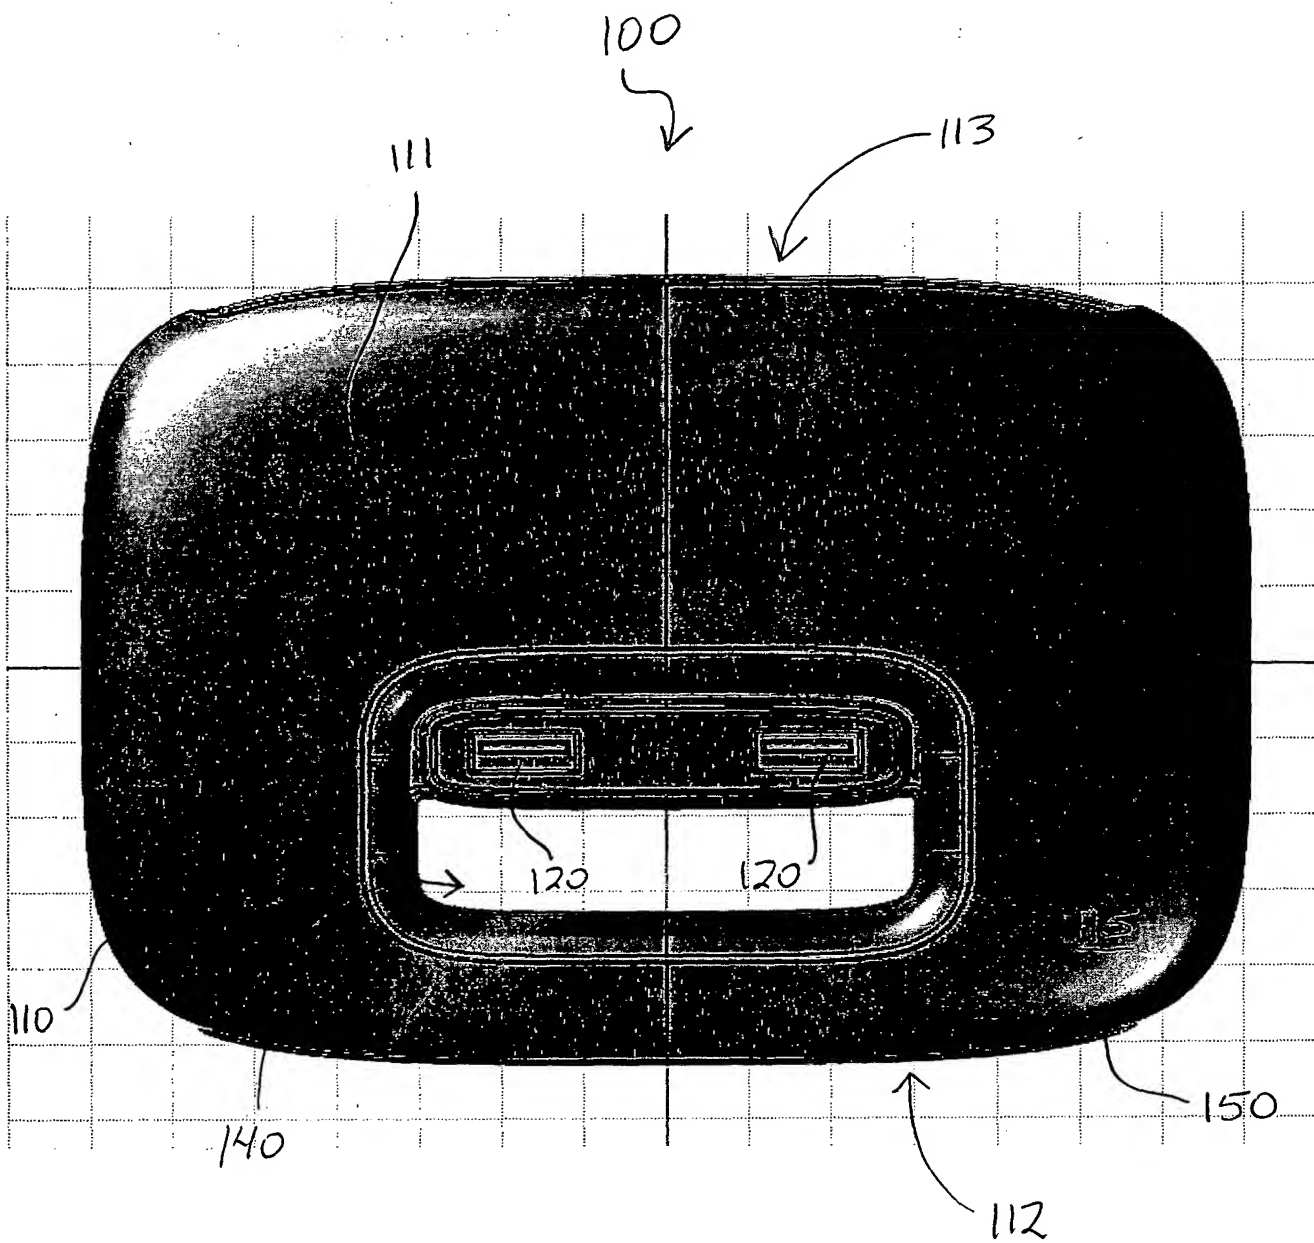


FIG. 3

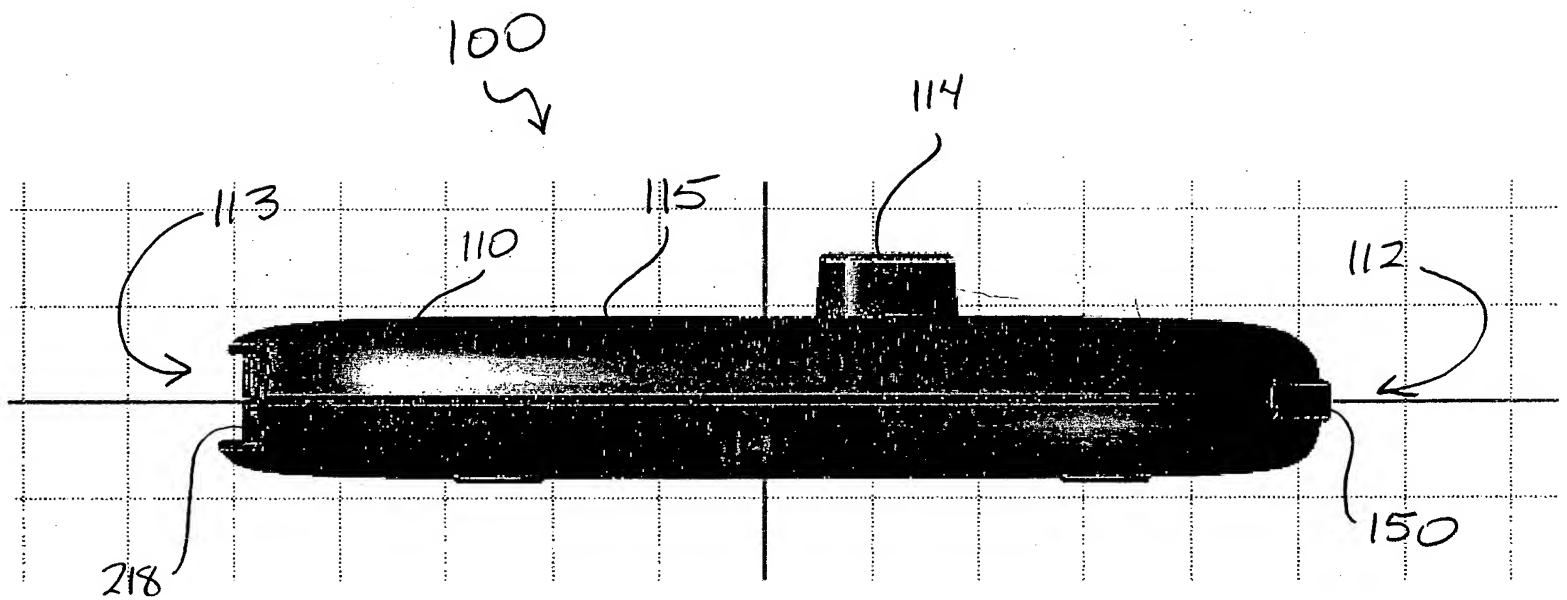


FIG. 4

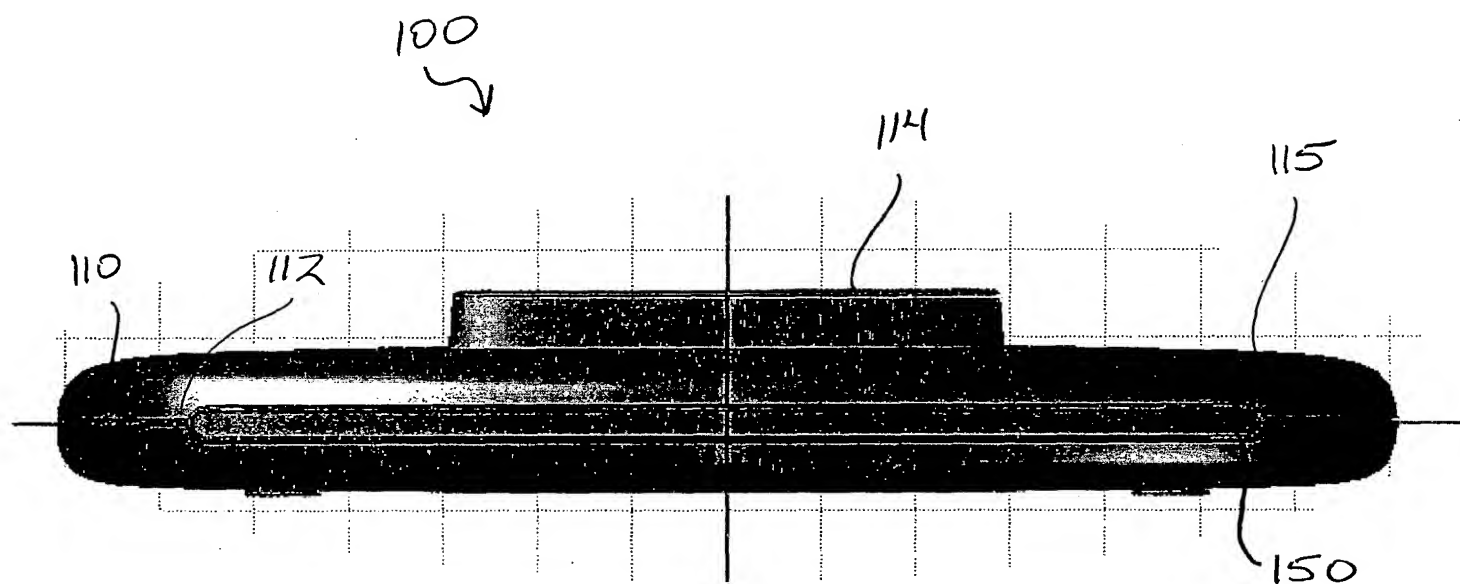


FIG. 5

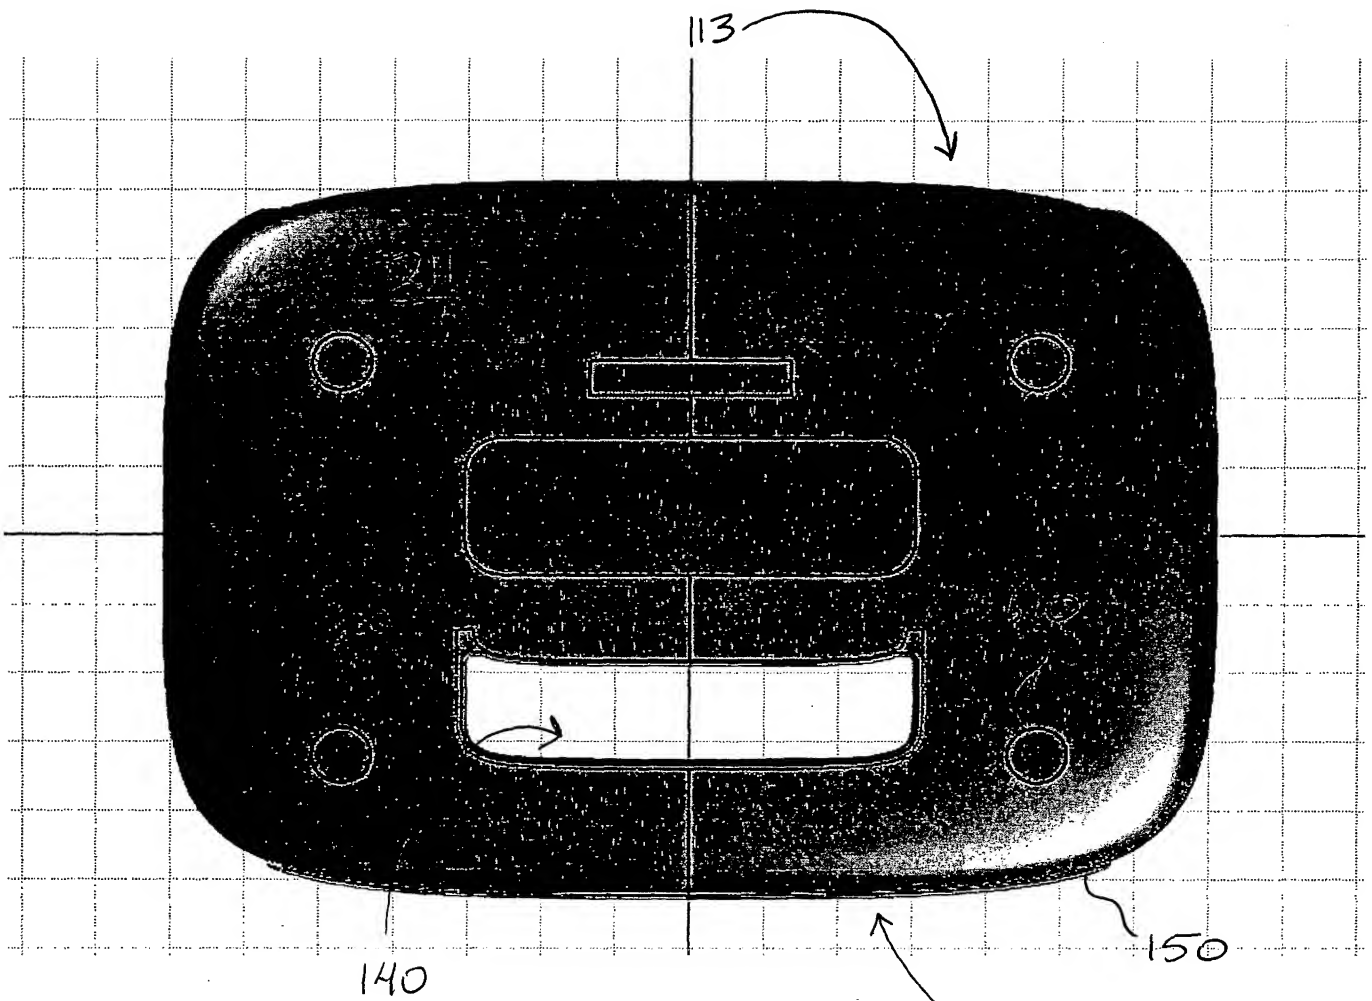


FIG. 6

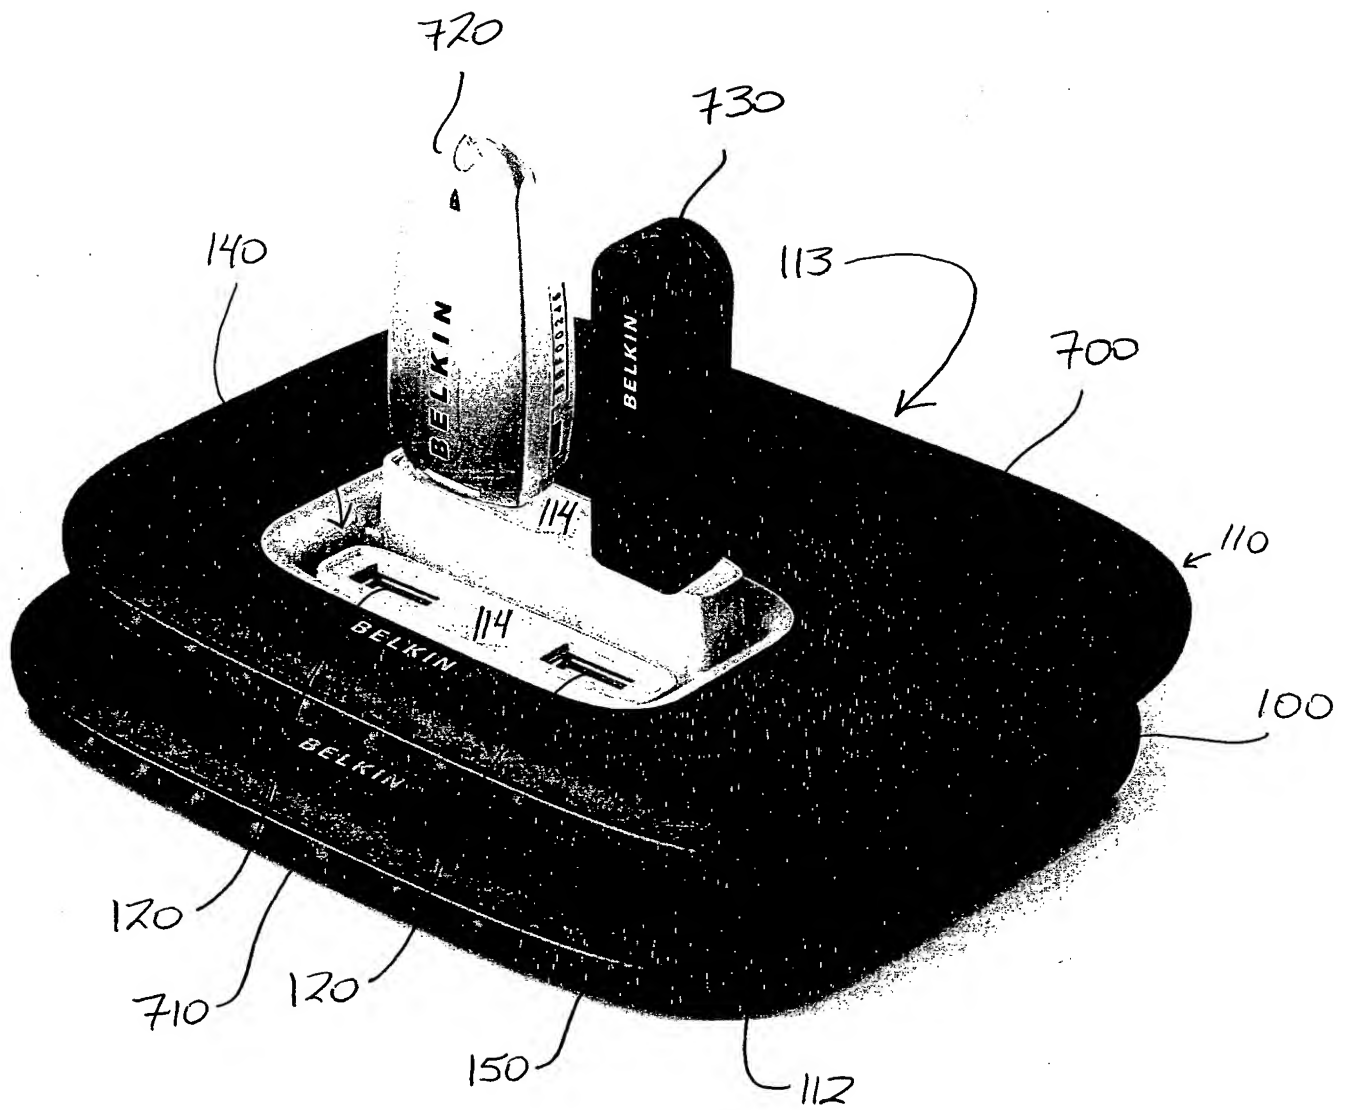


FIG. 7

FIG. 8

800

810 Provide a housing comprising a top portion having a first region higher than a second region, a bottom portion opposite the top portion, a first side between the top portion and the bottom portion, and a second side between the top portion and the bottom portion



820 Provide a first universal serial bus port



830 Provide a second universal serial bus port



840 Assemble the universal serial bus hub such that the first universal serial bus port is located at the first region of the top portion and the second universal serial bus port is located at the second side



850 Provide at least a portion of the first side to comprise a translucent material



860 Provide a status indicator at the first side



870 Coat at least a portion of the housing with a rubberized material